



- Normally associated with a **ring physical topology** there is a **ring logical topology**.
- One of the solutions for **medium control** is the **Token Ring**. Periodically it is sent from station to station one frame called **token**.
- A station can only transmit in the **possession of the token**. When a station has no data to transmit it copies the token for the following station
- The **frames circulating in the ring** are removed by the transmitter node. ( **Not used now** )

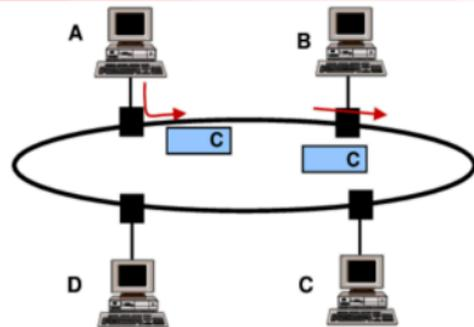

A sends one frame to C. The frame passes through B. This node ignores the frame.

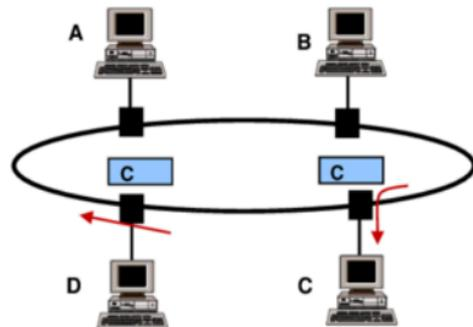

In C the frame is copied. This frame continues to circulate in the ring up to A where it is removed.